

Filtro depurazione acqua a squadra con flange PN6/PN16
Vertical intake water strainer with PN6/PN16 flanges

Filtro omologato RINA MAC
RINA MAC certificate

A3



Tabella flange a pag. 182
Flange table on page 182

* Con flangia PN16
With flange PN16

1283	10500	13700	16400	23800	32600	45000	63000	95000
Weight (gr)*	10500	13700	16400	23800	32600	45000	63000	95000
3283	3600	4900	5800	7600	10300	14200	19900	30000
Weight (gr)*	3600	4900	5800	7600	10300	14200	19900	30000
H	275	324	347	375	453	505	570	660
H1	170	200	218	250	300	342	370	430
L1	110	125	135	155	175	200	232	278
L	183	227	245	278	314	362	421	501
DN	50	65	80	100	125	150	200	250


Bronzo
Bronze

3283



Alluminio anodizzato nero
Black anodized aluminium

Diagramma portate - perdite di carico
Flow rate - loss of pressure diagram

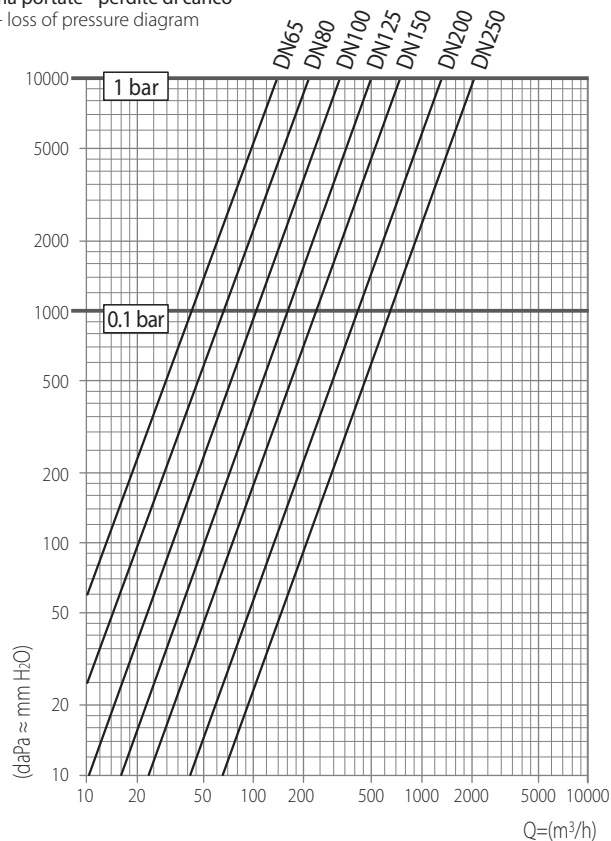

Corpo in bronzo / Alluminio anodizzato nero
Bronze / Black anodized aluminium casing

Elemento filtrante in acciaio inox AISI 316L
AISI 316L stainless steel inside filter

Coperchio in bronzo / Alluminio anodizzato nero
Bronze / Black anodized aluminium cover

Guarnizioni in neoprene
Neoprene o-ring

DN	0.1 bar	1 bar
65	43500	139000
80	66800	210000
100	104000	328000
125	160000	507000
150	231000	730000
200	410000	1298000
250	641000	2028000

Portate di acqua attraverso il filtro pulito - lt/h
Flow-rate capacity through the clean filter - lt/h