


valvole di non ritorno e filtraggio non-return and filtering valves

1504

Filtro a 45°
45° filter

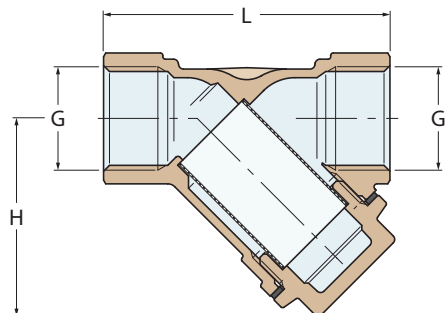


FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

Ottone sabbiato
Yellow brass

1504	■	■	■	■	■	■	■	■
PN	20	20	20	20	20	20	20	20
Weight (gr)	150	130	140	220	420	605	830	1330
H	40	40	40	50	60	68	75	90
L	55	55	58	70	87	96	106	126
G	1/4"	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"

1530

Valvola di fondo tenuta gomma
Rubber disk foot-valve

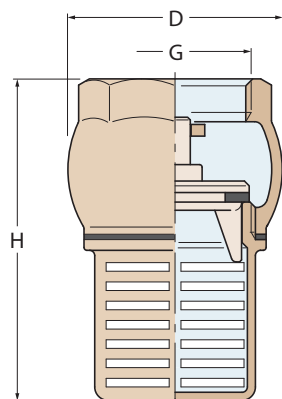


FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

Ottone sabbiato
Yellow brass

1530	■	■	■	■	■	■	■	■
PN	10	10	10	8	8	6	6	6
Weight (gr)	200	300	505	595	910	1500	2120	3580
H	70	82	95	103	121	137	173	199
D	45	51	62	69	80	100	121	145
G	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"

1531

Valvola di fondo tubolare tenuta gomma
Tubular rubber gasket foot-valve

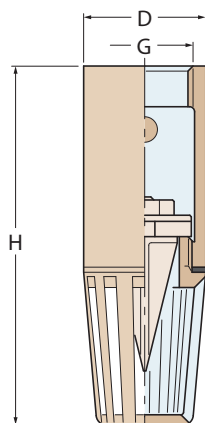

FILETTATURE / THREAD :
G = ISO 228/1 (BS 2779)

Ottone sabbiato
Yellow brass

1531	■	■	■	■	■	■	■	■
PN	10	10	10	8	8	6	6	6
Weight (gr)	200	280	400	600	865			
H	95	111	126	140	164			
D	30	37	46	52	63			
G	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"	4"